



- 1. EXISTING DOOR AND FRAME TO REMAIN. SEE KEYED NOTES 3 & 4 ON 1/A1.1 AND KEYED NOTES 2 & 3 ON 2/A1.1 FOR MODIFICATIONS TO GLAZING AND HARDWARE.
- 2. SOLID CORE WOOD DOOR WITH STEEL FRAME. DOOR TO HAVE 6"x2'-3"H WIRE MESH REINFORCED WINDOW. THE ENTRAPMENT SIDE OF THE DOOR SHALL BE REINFORCED WITH A STEEL SHEET COVER TO PREVENT REMOVAL OF THE DOOR.
- 3. DOOR TO HAVE ELECTRIC STRIKE AND DOOR POSITION SWITCH.
- 4. DOOR TO HAVE ELECTRONICALLY OPERATED CIPHER LOCK.
- 5. EXTERIOR OF DOOR TO BE REINFORCED W/STEEL SHEET TO PREVENT REMOVAL OF DOOR.

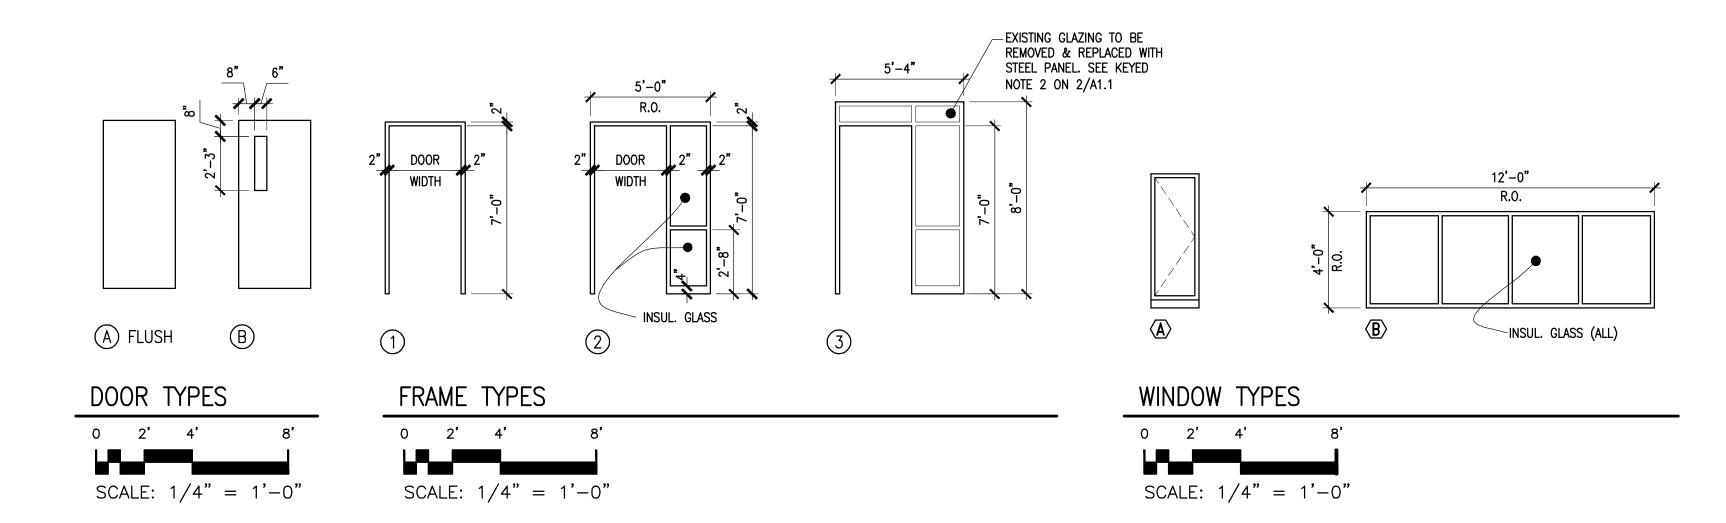


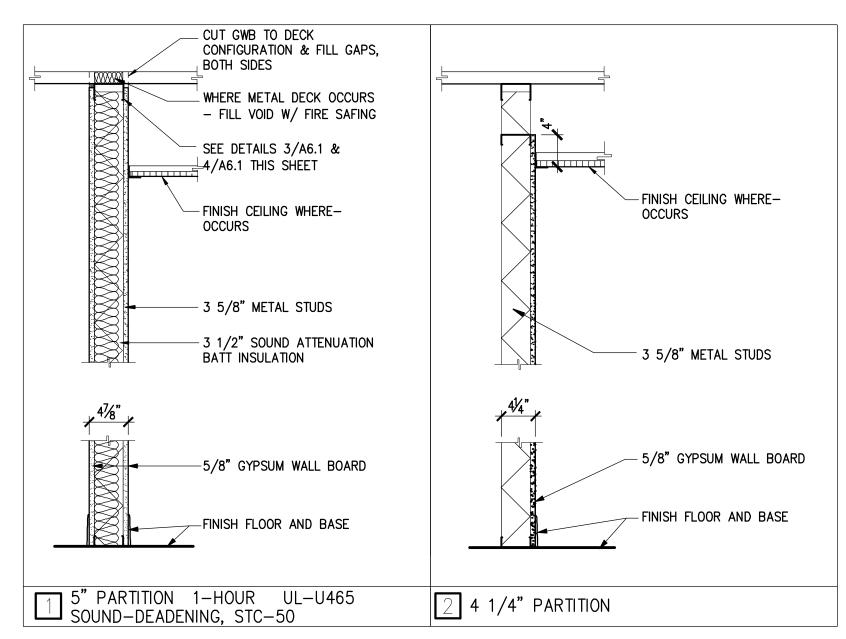





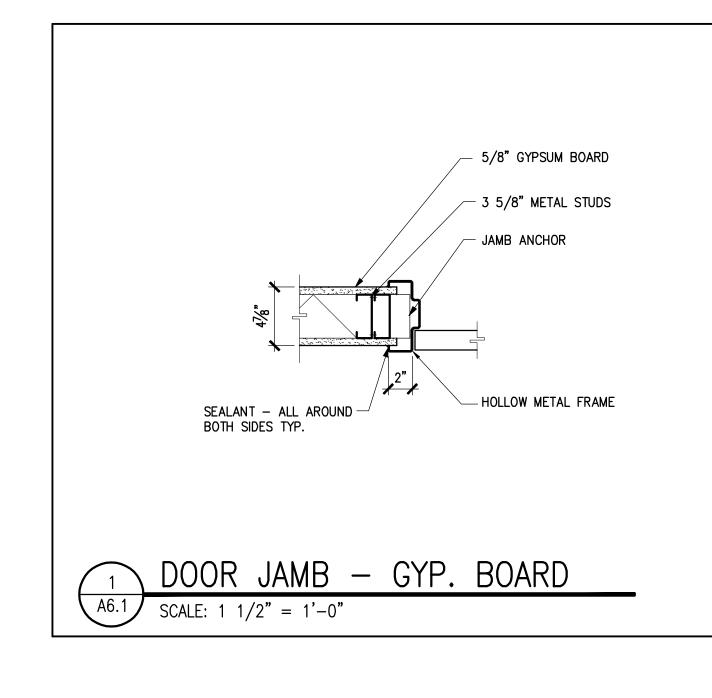

REVISION

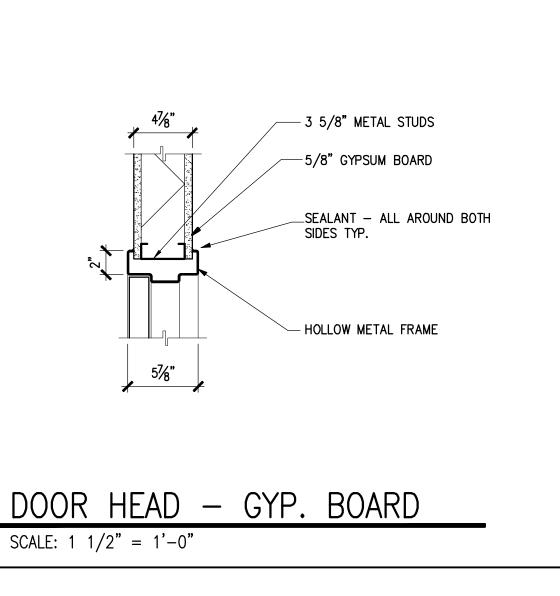

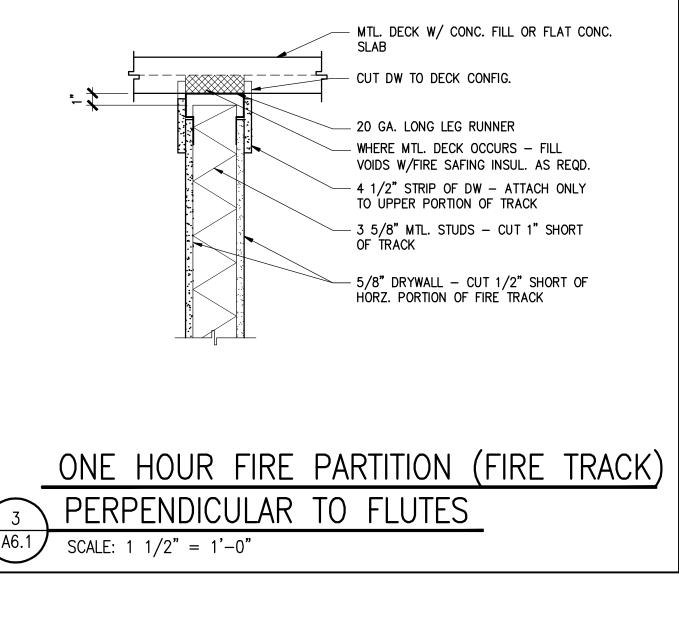


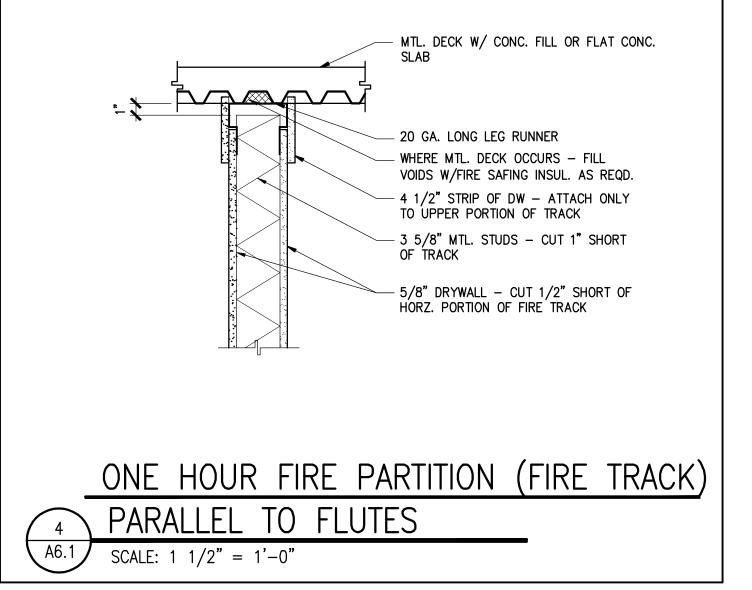



183rd Fighter Wing
Illinois Air National Guard





XXX



Hanson Professional Services Inc. 1525 South Sixth Street **Springfield, Illinois 62703-2686** DOOR SCHEDULE, DOOR, FRAME AND WINDOW TYPES, PARTITION TYPES AND DOOR DETAILS

COMMAND POST (CP) RELOCATION
183D FIGHTER WING
SPRINGFIELD, IL